

## SHARE™ 8700D


Outdoor, 50, 75, 100, or 125 Station (2-wire Decoder), Integrated Cellular Modem, Web-Based Intelligent Irrigation Controller

### FEATURES

- Model Type: Outdoor
- Enclosure Type: Plastic, Wall Mount
- Programming Type: Basic or Intelligent
- Number of Stations: 50, 75, 100, 125
- Number of Programs: 16
- Programmable Events: 64
- Number of Start Times: 4
- Master Valve Pump Starts: 1
- Run Times: 1 Min to 17 Hrs 59 Min
- Integrated Sensor Terminals: 2
- Flexible Scheduling Options:
  - Day(s) of Week
  - Day(s) of Month
  - Day(s) of Year
  - Day(s) to Skip (1-99 Days)
  - Odd/Even
- Qualifies for Water Conservation Rebates
  - EPA WaterSense Approved (Intelligent models only)

### COMMUNICATION

- Integrated Cellular Modem
  - GSM Radio
  - CDMA Radio
- Integrated Wi-Fi Modem
- Optional Remote Communication with RF (iWAN)

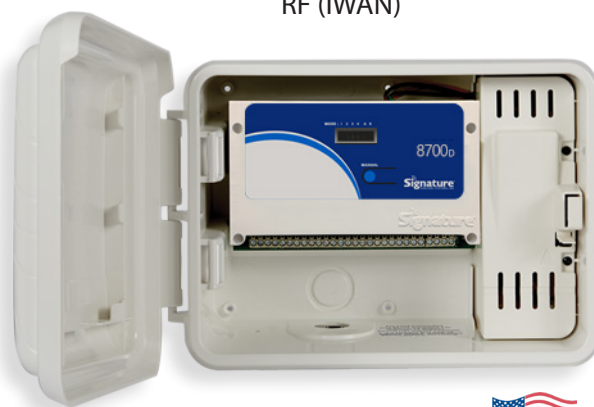

### HOW TO ORDER

8700D -050-15-USA				
Model	Stations	Program Type	Communication Type	Country Code
8700D	050	B = Basic	4 = GSM Radio Only	USA = United States
	075	I = Intelligent	5 = CDMA Radio Only	ISO*
	100		6 = GSM Radio + RF (iWAN)	
	125		7 = CDMA + RF (iWAN)	
			10 = Wi-Fi Modem Only	
			12 = Wi-Fi + RF (iWAN)	

\*International models - Enter ISO country code ie. Spain = ESP, France = FRA, etc.



TWO-WIRE  
DECODERS  
& LATCHING  
SOLENOIDS

### ELECTRICAL SPECIFICATIONS

#### Power Input

USA & Canada: 120VAC, 60Hz  
International: 230VAC, 50Hz

#### Station Output

All Models: 24VAC, 1.0 Amp

#### Max Load Per Station

All Models: 1.0 Amp

#### Station Capacity

All Models: Two 24VAC, 6VA Solenoid  
Valve per Station Plus a Master Valve

### DIMENSIONS (H X W X D)

#### Weather Resistant Cabinet:

9" (22.9 cm) x 12 (30.5 cm) x 5" (12.5 cm)

Enclosure Material: Plastic

Enclosure Type: Outdoor

### CERTIFICATIONS

Industry/Testing: UL, cUL, CE, CSA,  
C-tick, FCC Part 15