

SHARE™ 8700VM

Outdoor, 8 to 48 Station, Retrofit Into Wall Mount or Pedestal Enclosure, Integrated Cellular Modem, Web-Based Intelligent Irrigation Controller



FEATURES

- Model Type: Outdoor
- Enclosure Type: Retrofittable Controller for Installation Into Existing Wall-Mount or Pedestal Enclosure
- Programming Type: Basic or Intelligent
- Number of Stations: 8, 16, 24, 32, 40, 48
- Number of Programs: 16
- Programmable Events: 64
- Number of Start Times: 4
- Master Valve Pump Starts: 1
- Run Times: 1 Min to 17 Hrs 59 Min
- Integrated Sensor Terminals: 2
- Flexible Scheduling Options:
 - Day(s) of Week
 - Day(s) of Month
 - Day(s) of Year

- Qualifies for Water
- Conservation Rebates
 - EPA WaterSense Approved (Intelligent models only)

COMMUNICATION

- Integrated Cellular Modem
 - GSM Radio
 - CDMA Radio
- Integrated Wi-Fi Modem
- Optional Remote Communication with RF (iWAN)

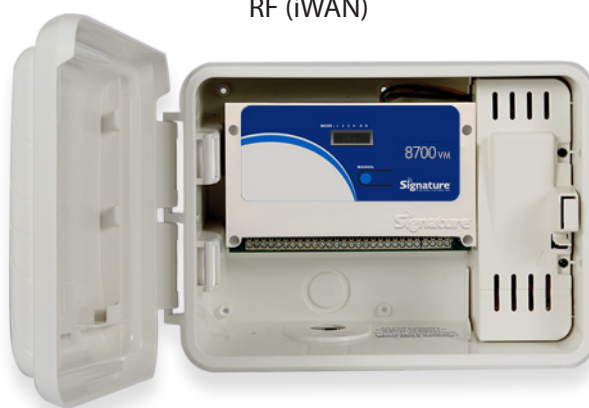

HOW TO ORDER

8700VM -16-15-USA				
Model	Stations	Program Type	Communication Type	Country Code
8700VM	08	B = Basic	4 = GSM Radio Only	USA = United States
	16	I = Intelligent	5 = CDMA Radio Only	ISO*
	24		6 = GSM Radio + RF (iWAN)	
	32		7 = CDMA + RF (iWAN)	
	40		10 = Wi-Fi Modem Only	
	48		12 = Wi-Fi + RF (iWAN)	

*International models - Enter ISO country code
ie. Spain = ESP, France = FRA, etc.

Optional:
PANEL-MOUNT VALVE
EXPANSION MODULES
(8 / 16 STATIONS EACH)

ELECTRICAL SPECIFICATIONS

Power Input

USA & Canada: 120VAC, 60Hz
International: 230VAC, 50Hz

Station Output

All Models: 24VAC, 1.0 Amp

Max Load Per Station

All Models: 1.0 Amp

Station Capacity:

All Models: Two 24VAC, 6VA Solenoid
Valve per Station Plus a Master Valve

DIMENSIONS (H X W X D)

Weather Resistant Cabinet

9" (22.9 cm) x 12" (30.5 cm) x 5" (12.5 cm)

Enclosure Material: Plastic

Enclosure Type: Outdoor

CERTIFICATIONS

Industry/Testing: UL, cUL, CE, CSA,
C-tick, FCC Part 15

