

SMART LIGHTING MODULE

Turn Your Manual Outdoor Lighting System into a Smart Yard Solution and Customize and Automate Your Outdoor Lighting and More.

Looking for an easy way to upgrade your outdoor lighting? Signature has the solution! Use the Signature Smart Lighting Module to easily upgrade your yard into a Smart Yard. Signatures Smart lighting module offers a convenient way to automate your low voltage lighting and other landscape features - all in an easy-to-install wireless system. Best of all, it installs into new or existing lighting systems.

Adding a Signature Residential Irrigation Controller* with our Signature Lighting Module and our easy-to-use app, you can control not only your lighting, but your irrigation system as well. You officially have a Smart Yard and can manage both your irrigation and lighting from one app!



KEY FEATURES & BENEFITS

Easy-to-Use App Interface & Programming

Dashboard for Easy Access to Many Functions.
Custom Start/Stop Times. Weekly/Monthly & Event Based Programmable.
Astronomical Timing – Edit Dusk/Dawn times by your location and seasonal changes.

Remote Access to Lighting from Anywhere

Using Your Home Wi-Fi You Control your Lighting from Anywhere at Anytime.

Upgrade Your System without the Expense

Easily retrofits into existing lighting installations and Transformers.
Compatible with any 120V device, plugs directly into the transformer.

Future Proof with Automatic Upgrades

Get the Latest Features for Free with Automatic Upgrades When You Connect.

Mobile Device OS Compatibility

Apple iOS 9 or greater.

Large Resident and Commercial Solutions

Long Range Antenna Available for Custom Solutions.

WHAT'S INCLUDED IN THE BOX

- 1 Smart Lighting Module
- 1 Antenna
- 1 Plastic Antenna Protection Container
- 1 User Manual
- Signature Smart Lighting App Software available for download on Apple App Store

LED INDICATORS

LED 1	LED 2	DEVICE STATE
OFF	OFF	No Power
Flashing	OFF	Searching for AP Connection
Flashing	ON	Connected to AP, Good Wi-Fi Signal
Slow Flash	ON	Connected to AP, Weak Wi-Fi Signal
ON	OFF	Transitioning to AP Provisioning Mode
ON	ON	AP Provisioning Mode

SPECIFICATIONS

ELECTRICAL

110V Switch / Plug / Receptacle.
NEMA 5-15 Receptacle (125VAC, 15A Max),
2 pole + ground

WI-FI RADIO

2.4GHz IEEE 802.11b/g/n compatible.

ANTENNA RANGE

Up to 200 feet.

OPERATING AMBIENT

Range -20° C to 70° C
Max relative humidity 80%, up to 61° C,
decreasing linearly to 50% relative humidity
at 70° C.

MOBILE DEVICES OS SUPPORT

iOS 10 (or greater).

WARRANTY

5 year warranty on mechanical
& electrical components.


Compatible with most lighting transformers

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
SHSD-OLM-I10-USA	Signature Wi-Fi Outdoor Light Module with Antenna
ANTWF1	Long Range Antenna

* Signature Controllers are not Required for Lighting Module to Control Lights through a Transformer.

DIMENSIONS

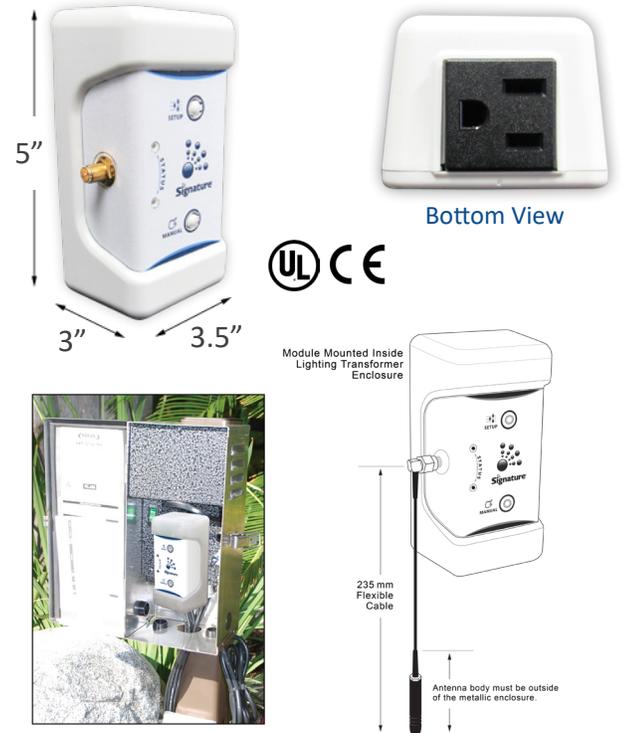

Preliminary Document - Specifications Are Subject To Change Without Notice. Patent Pending